

REMI

Bench top Centrifuges

INTRODUCING

WORLD CLASS

PREMIUM RANGE

NEYA



Designed




Derived from the Hindi word “NAYA” which means “new”, “novelty”, “innovation”, “NEYA” is the name given to the new generation of centrifuges recently developed by REMI.

REMI, market leader in centrifuges with over 55 years of manufacturing experience, combined with European design and style, makes a perfect combination to develop and present the whole range of “NEYA” centrifuges with performance and characteristics suitable for all the operational needs of modern laboratories.


It is with these premises, we are pleased to present the new range of “NEYA” Centrifuge.

NEYA..... a new concept..... a new generation


- Automatic rotor detection, check of presence of accessories and compatibility with maximum speed
- Safety speed limiter function
- Controlled by microprocessor
- Backlit color LCD display with contemporary visualization of all parameters
- Digital adjustment of acceleration and deceleration levels
- Compact sizes to optimize the space in laboratory
- Stainless steel internal bowl with optimal height for loading and unloading of samples
- Imbalance detection system with automatic functioning stop to avoid accidents
- Automatic locking system of the lid
- Safety opening of the lid in case of power failure
- Brushless motor maintenance free and no carbon deposits
- Construction in accordance with European directives

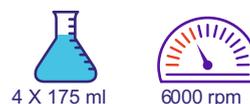

maximum capacity 4 x 175 ml
maximum speed 6000 rpm



Standby



Centrifugation cycle



Alarm signal

Technical Data	
Features	NEYA-8
Maximum capacity	4 x 175 ml (swing out) - 6 x 100 ml (fixed angle)
Maximum speed	4500 rpm (swing out) - 6000 rpm (fixed angle)
Setting RPM	Yes
Setting RCF	-
Display RCF	-
Timer	00:30 to 99:50 (mm:ss) and continuous mode
Date and Time	-
Acceleration levels	L-M-H (Low - Medium - High)
Deceleration levels	L-M-H (Low - Medium - High)
Spin function	-
Programs	-
Indication of rotor	Yes
Noise	≤ 55 dB
Directive / Standard	IEC 61010-1 ; IEC 61010-2-020
External dimensions WxDxH/Weight	450 x 590 x 330 mm / 40 Kg

Supply: 220-240 Volts, 50 Hz Single Phase.





Optimal height for load and download of samples

- Automatic rotor detection, check of presence of accessories and compatibility with maximum speed
- Safety speed limiter function
- 10 storable programs with protection function
- Setting of speed in RPM and RCF
- Short Spin function and precool (NEYA 10R)
- Temperature range from 0°C to +40°C (NEYA 10R)
- Controlled by microprocessor and backlit color LCD display with contemporary visualization of all parameters
- Digital adjustment of acceleration and deceleration levels
- Stainless steel internal bowl with optimal height for loading and of samples
- Imbalance detection system with automatic functioning stop to avoid accidents
- Automatic locking system of the lid
- Safety opening of the lid in case of power failure
- Brushless motor maintenance free and no carbon deposits
- Construction in accordance with European directives



maximum capacity 4 x 175 ml
maximum speed 6000 rpm

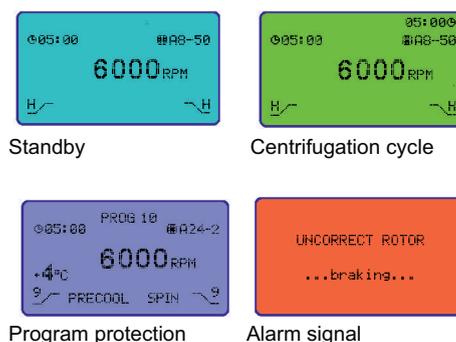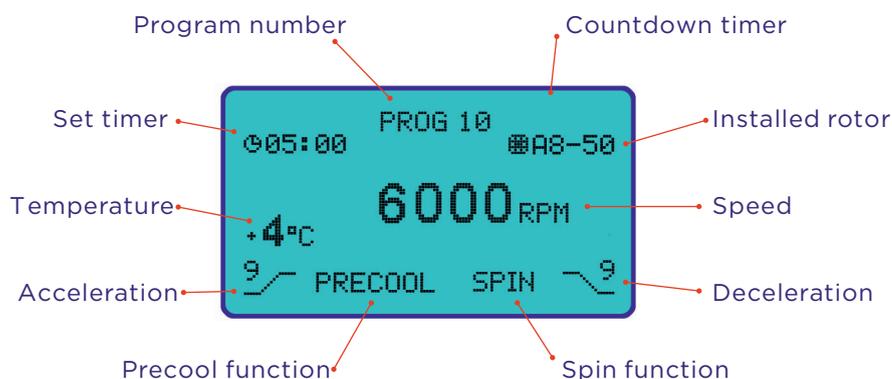

Technical Data		
Features	NEYA-10	NEYA-10R
Maximum capacity	4 x 175 ml (swing out) - 6 x 100 ml (fixed angle)	
Maximum speed	4500 rpm (swing out) - 6000 rpm (fixed angle)	
Setting RPM	Yes	
Setting RCF	Yes	
Display RCF	Yes	
Timer	00:30 to 99:50 (mm:ss) and continuous mode	
Date and Time	Yes	
Acceleration levels	0-9 (0 = min - 9 = max)	
Deceleration levels	0-9 (0 = min - 9 = max)	
Temperature range	-	0°C to +40°C
Precool function	-	Yes
Display temperature	-	Yes (°C and °F)
Spin function	Yes	
Programs	10 programs with protection function	
Indication of rotor	Yes	
Noise	≤ 55 dB	≤ 55 dB
Directive / Standard	IEC 61010-1 ; IEC 61010-2-020	
External dimensions WxDxH/Weight	450 x 590 x 330 mm / 40 Kg	730 x 640 x 330 mm / 70 Kg
Recommended Voltage Stabilizer	-	VS-02



Ventilated centrifuge NEYA 10




Visual signal of end of centrifugation


Supply: 220-240 Volts, 50 Hz Single Phase.

NEYA-12 & NEYA-16R

- Automatic rotor detection, check of presence of accessories and compatibility with maximum speed
- Safety speed limiter function
- 10 storable programs with protection function
- Setting of speed in RPM and RCF
- Short Spin function and precool (NEYA 16R)
- Temperature range from 0°C to +40°C (NEYA 16R)
- Controlled by microprocessor and backlit color LCD display with contemporary visualization of all parameters
- Digital adjustment of acceleration and deceleration levels
- Stainless steel internal bowl with optimal height for loading and unloading of samples
- Imbalance detection system with automatic functioning stop to avoid accidents
- Automatic locking system of the lid
- Safety opening of the lid in case of absence of electric power
- Brushless motor maintenance free and no carbon deposits
- Construction in accordance with European directives

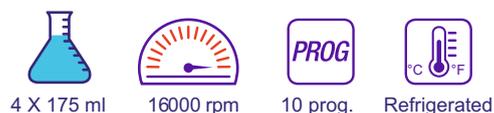


maximum capacity 4 x 175 ml
maximum speed 16000 rpm

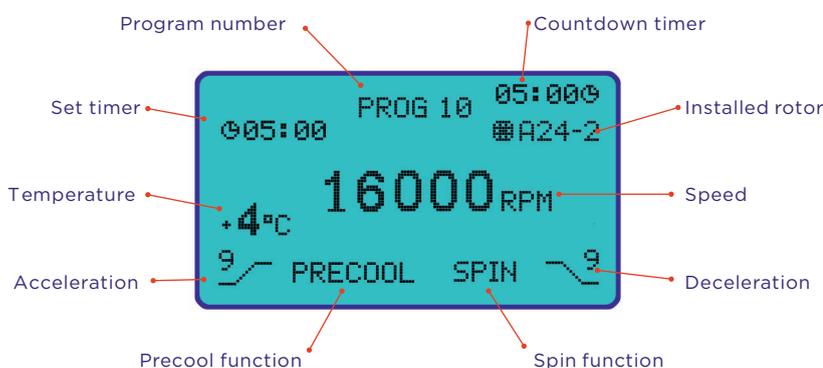


Standby



Centrifugation cycle



Program protection



Alarm signal

Technical Data		
Features	NEYA-12	NEYA-16R
Maximum capacity	6 x 50 ml (fixed angle)	4 x 175 ml (swing out) - 6 x 100 ml (fixed angle)
Maximum speed	16000 rpm (fixed angle)	4500 rpm (swing out) - 16000 rpm (fixed angle)
Setting RPM		Yes
Setting RCF		Yes
Display RCF		Yes
Timer	00:30 to 99:50 (mm:ss) and continuous mode	
Date and Time	Yes	
Acceleration levels	0-9 (0 = min - 9 = max)	
Deceleration levels	0-9 (0 = min - 9 = max)	
Temperature range	-	0°C to +40°C
Precool function	-	Yes
Display temperature	-	Yes (°C and °F)
Spin function		Yes
Programs	10 programs with protection function	
Indication of rotor		Yes
Noise	≤ 55 dB	≤ 55 dB
Directive / Standard	IEC 61010-1; IEC 61010-2-020	
External dimensions WxDxH/Weight	450 x 590 x 330 mm / 40 Kg	730 x 640 x 330 mm / 70 Kg
Recommended Voltage Stabilizer	-	VS-02

Supply: 220-240 Volts, 50 Hz Single Phase.

Technical Data

		 NEYA 8	 NEYA 10	 NEYA 10R	 NEYA 12	 NEYA 16R
Max. Speed	rpm	6000	6000	6000	16000	16000
Max. RCF	g	4800	4800	4800	21000	21000
Max. Tube size	ml	175	175	175	50	175
Max. capacity		700	700	700	300	700
No. of Programs		-	10	10	10	10
Acceleration#		H-M-L	10 Profiles	10 Profiles	10 Profiles	10 Profiles
Deceleration#		H-M-L	10 Profiles	10 Profiles	10 Profiles	10 Profiles
Lowest Temp.*	°C	-	-	0	-	0
 S 4-175 max 4500 rpm max 3600 xg		✓	✓	✓		✓
 S 6-96 MP 6 x 96 deep wells max 3200 rpm		✓	✓	✓		✓
 A 32-15 32 x 15 ml max 4500 rpm max 3280 xg		✓	✓	✓		✓
 A 8-50 8 x 50 ml max 6000 rpm max 4800 xg		✓	✓	✓		✓
 A 24-2 24 x 2 ml max 15000 rpm max 21000 xg					✓	✓
 A 36-05 36 x 0.5 ml max 15000 rpm max 21000 xg					✓	✓
 A 6-100 6 x 100 ml max 5000 rpm max 3330 xg		✓	✓	✓		✓
 A 6-50 6 x 50 ml max 9500 rpm max 10050 xg					✓	✓
 PCR 4-8 4 strip of 8 PCR max 15000 rpm max 21000 xg					✓	✓
 A 12-5 12 x 5 ml max 14000 rpm max 20380 xg					✓	✓
 A 12-2 12 x 2 ml max 14000 rpm max 20380 xg					✓	✓
 HE 24-75 Ø1 x 75 mm max 12000 rpm max 15300 xg 24 capillars					✓	✓

Notes:

* Depending on capacity, type of rotor, centrifugation speed, ambient temperature and other process parameters
 # High - Medium - Low


Selection guide for rotors

Nomenclature method of Rotors & accessories

Alphabets in beginning	Numbers in middle	Alphabets at end
A= Fixed angle rotor	1st numerical = Quantity per insert	F= Falcon® tube
S= Swing out rotor	2nd numerical = Tube capacity (ml)	R = Round bottom tube
B= Bucket		L= Long Tube
I= Insert for bucket		S= Short Tube
C= Cushion		
RE= Reducer		
HE= Haematocrit Rotor		

Examples	
S 4-175	(Swing out Rotor, 4 tubes of 175ml capacity)
A 32-15	(Angle Rotor, 32 tubes of 15ml capacity)
B 2-50F	(Bucket, 2 tubes of 50ml capacity, Falcon®)
I 1-50R	(Insert, 1 tube of 50ml capacity round bottom)
C -15F	(Cushion for 15ml Falcon®)
RE 15-5/7L	(Reducer from 15ml to 5/7 ml long tube)

Options to be selected from following Rotors

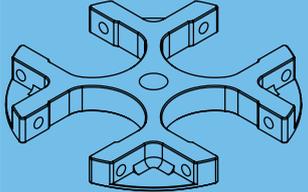

Swing Out Rotor S 4-175
Max. Speed (RPM) 4500
Max. RCF (g) 3600

Metal Buckets suitable for Swing Out Rotor S 4-175 (Set of 4 buckets)

B 175 (with Bio safety Lid L 175)	B 2-50 F B 2-50 R	B 7-15 F B 7-15 R	B 12-10	B 14-5/7	B 16-5/7
					



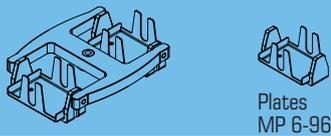


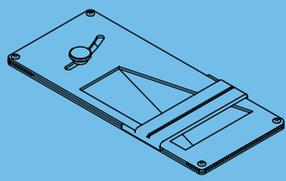
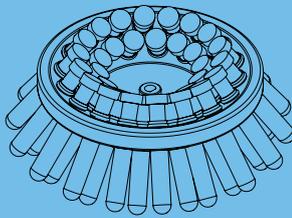


Image of Tube										
Tube Capacity (ml)	175	100	50		15		15		15	
Ø x L (mm)	57 x 99	45 x 104	29 x 116		30 x 110		16.5 x 120		17 x 110	
Max. Cap dia (mm)	59.5		34.5				22.5			
Type of Tube	Plastic	Glass / Plastic*	Falcon®		Glass / Plastic*		Falcon®		Glass	
No of tubes/insert	1	1	1	2	1	2	4	7	4	7
No of tubes/rotor	4	4	4	8	4	8	16	28	16	28
Bucket Cat No.	B 175	B 175	B 175	B 2-50 F	B 175	B 2-50 R	B 175	B 7-15 F	B 175	B 7-15 R
Insert Cat No.		I 1-100	I 1-50-F		I 1-50 R		I 4-15 F		I 4-15 R	
Image of Insert (Set of 4, supplied with suitable bottom cushions)	No			No		No		No		No
Tubes supplied	Yes	Yes (Glass)	No		Yes (Glass)		No		Yes (Glass)	




Image of Tube							
Tube Capacity (ml)	10		5-7		5-7		2
Ø x L (mm)	15.5 x 106		12.5 x 106		12.5 x 81		11 x 42
Max. Cap dia (mm)	17		16		16		
Type of Tube	Vacutainer®		Vacutainer®		Vacutainer®		Micro
No of tubes/Insert	7	12	7	14	7	16	12
No of tubes/rotor	28	48	28	56	28	64	48
Bucket Cat No.	B 175	B 12-10	B 175	B 14-5/7	B 175	B 16-5/7	B 175
Insert Cat No.	I 7-10		I 7- 5/7		I 7-5/7		I 12-2
Image of Insert (Set of 4, supplied with suitable bottom cushions)		No		No		No	
Tubes supplied	No	No	No	No	No	No	Yes

Selection guide for rotors

Swing Out Rotor S 6-96 MP Max speed RPM 3200 Max RCF (g) 1950 		PCR Rotor PCR 4-8 Max speed RPM 15000 Max RCF (g) 21000 		Angle Rotor HE 24-75 Max speed RPM 12000 Max RCF (g) 15300 		Reading Device RD 24-75 	
Image of Tube		Image of Tube		Image of Tube		W x D x H	127 x 84 x 18
Tube Capacity (ml)	6 x 96 wells	Tube Capacity (ml)	4 strips of 8 PCR	Tube Capacity (ml)	–		
Type of Tube	Micro	Type of Tube	PCR	Type of Tube	Capillary		
No of tubes/rotors	6	No of tubes/rotors	4	No of tubes/rotors	24		
W x D x L (mm)	127 x 84 x 18	Ø x L (mm)	6 x 78	Ø x L (mm)	1 x 75		
Tubes supplied	No	Tubes supplied	No	Tubes supplied	Yes		


Angle Rotor A 32-15 Max speed RPM 4500 Max RCF (g) 3280 	Image of Tube					
	Tube Capacity (ml)	15	15	10	5/7	5/7
	Type of Tube	Falcon®	Plastic	Vacutainer®	Vacutainer®	Vacutainer®
	Insert Cat No	C 15F	No	No	RE 15-5/7L	RE 15-5/7S
	No of tubes/Insert	1	1	1	1	1
	No of tubes/rotors	32	32	32	32	32
	Ø x L (mm)	16.5 x 120	17 x 102	15.5 x 106	12.5 x 106	12.5 x 81
	Tubes supplied	No	Yes	No	No	No

(Rotor is supplied with suitable SS tubes as carriers)

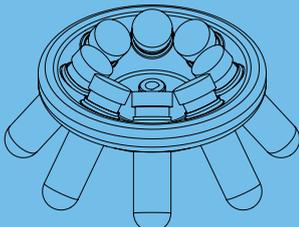Angle Rotor A 8-50 Max speed RPM 6000 Max RCF (g) 4800 	Image of Tube					
	Tube Capacity (ml)	50	50	15	15	10
	Type of Tube	Falcon®	Plastic	Falcon®	Plastic	Vacutainer®
	Insert Cat No	C 50F	No	RE 50-15F	RE 50-15R	RE 50-10
	No of tubes/Insert	1	1	1	1	1
	No of tubes/rotors	8	8	8	8	8
	Ø x L (mm)	29 x 116	30 x 100	16.5 x 120	17 x 102	15.5 x 106
	Tubes supplied	No	Yes	No	Yes	No





(Rotor is supplied with suitable SS tubes as carriers)

Selection guide for rotors

 Angle Rotor A 6-100 Max speed RPM 5000 Max RCF (g) 3330					
Image of Tube					
Tube Capacity (ml)	100	50	50	15	15
Type of Tube	Glass / Plastic	Falcon®	Glass / Plastic	Falcon®	Round Plastic/Glass
Insert Cat No	No	RE 100-50F	RE 100-50R	RE 100-15F	RE 100-15R
No of tubes/Insert	1	1	1	1	1
No of tubes/rotors	6	6	6	6	6
Ø x L (mm)	45.5 x 104	29 x 116	30 x 110/100	16.5 x 120	17 x 102/110
Tubes supplied	Yes (Plastic)	No	Yes (Plastic)	No	Yes (Plastic)

(Rotor is supplied with suitable SS tubes as carriers)

 Angle Rotor A 12-5 Max speed RPM 15000 Max RCF (g) 20880	
Image of Tube	
Tube Capacity (ml)	5
Type of Tube	Micro
Insert Cat No	No
No of tubes/Insert	-
No of tubes/rotors	12
Ø x L (mm)	16 x 59
Tubes supplied	No

 Angle Rotor A 6-50 Max speed RPM 9500 Max RCF (g) 10050					
Image of Tube					
Tube Capacity (ml)	50	50	15	15	10
Type of Tube	Falcon®	Plastic	Falcon®	Plastic	Vacutainer®
Insert Cat No	C 50F	No	RE 50-15F	RE 50-15R	RE 50-10
No of tubes/Insert	1	1	1	1	1
No of tubes/rotors	6	6	6	6	6
Ø x L (mm)	29 x 116	30 x 100	16.5 x 120	17 x 102	15.5 x 106
Tubes supplied	No	Yes	No	Yes	No

 Angle Rotor A 36-05 Max speed RPM 15000 Max RCF (g) 21000		
Image of Tube		
Tube Capacity (ml)	0.5	0.2
Type of Tube	Micro	Micro
Insert Cat No	No	RE 05-02
No of tubes/Insert	1	1
No of tubes/rotors	36	36
Ø x L (mm)	7.5 x 31	6 x 22
Tubes supplied	No	No

(Rotor supplied with all suitable inserts)

 Angle Rotor A 24-2 Max speed RPM 15000 Max RCF (g) 21000			
Image of Tube			
Tube Capacity (ml)	2	0.5	0.2
Type of Tube	Micro	Micro	Micro
Insert Cat No	No	RE 2-05	RE 2-02
No of tubes/Insert	1	1	1
No of tubes/rotors	24	24	24
Ø x L (mm)	11 x 41	7.5 x 31	6 x 22
Tubes supplied	No	No	No

(Rotor supplied with all suitable inserts)

 Angle Rotor A 12-2 Max speed RPM 16000 Max RCF (g) 16140			
Image of Tube			
Tube Capacity (ml)	2	0.5	0.2
Type of Tube	Micro	Micro	Micro
Insert Cat No	No	RE 2-05	RE 2-02
No of tubes/Insert	1	1	1
No of tubes/rotors	12	12	12
Ø x L (mm)	11 x 41	7.5 x 31	6 x 22
Tubes supplied	No	No	No

(Rotor supplied with all suitable inserts)